



mary smith Project

Lowe's Window Installation Project

Price includes all product, labor, delivery, any associate fees, and clean up.


Installation of 22 Pella Lifestyle windows (window specifications are listed below) - Pocket Replacement.

All windows will require 1x2 exterior trim (trim will need to be painted).


Installation of one Reeb Primed 6-panel double interior door (Reeb specification sheet is attached).

Project is eligible for 84 months at 0% interest with the Lowe's Rewards Card - Estimated monthly payment is included below.

Project is tax exempt.

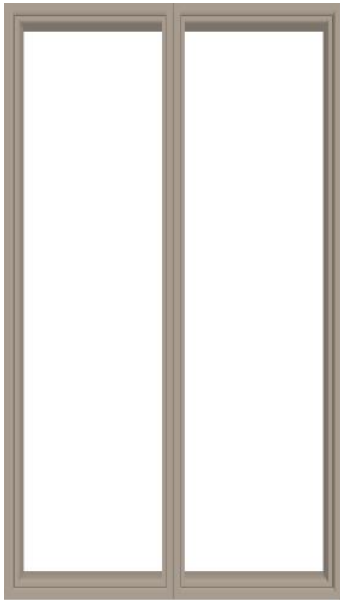

Exterior

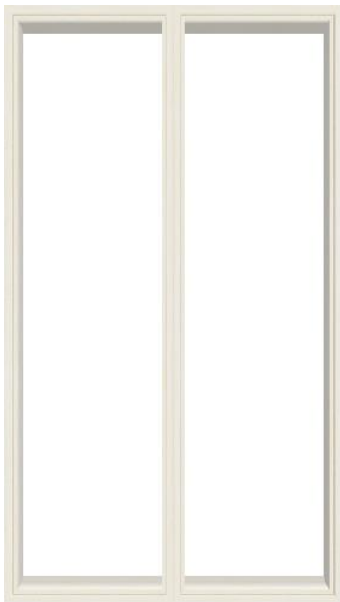

Interior

Sunroom windows

Quantity 4


Options

| | |
|--|--|
| Description: | <i>Pella® Lifestyle Series Rectangle</i> |
| Number Wide: | 2 |
| Bundle: | <i>Pella® Lifestyle Series Bundle</i> |
| Unit Type: | <i>Complete Unit</i> |
| Performance Options: | <i>Standard</i> |
| Select U.S. ENERGY STAR® Climate Zone: | <i>South Central</i> |
| 2021 IECC® Climate Zone for this store location: | <i>Climate Zone 3</i> |
| Exterior Material Type: | <i>Clad</i> |
| Sizing: | <i>Keep size</i> |
| Standard Width: | <i>Non Standard Width</i> |
| Standard Height: | <i>Non Standard Height</i> |
| Frame Width: | <i>23.75</i> |
| Overall Frame Width: | <i>47.5</i> |
| Overall Frame Height: | <i>83.75</i> |
| Rough Opening Width: | <i>48.25</i> |
| Rough Opening Height: | <i>84.5</i> |
| Hinged Glass Panel Option: | <i>Without Hinged Glass Panel</i> |
| Operation / Venting: | <i>Fixed Frame</i> |
| Base Frame Depth: | <i>5"</i> |
| Base Wall Depth: | <i>3 11/16"</i> |
| Vertical Mull Type: | <i>Factory Mull</i> |
| Vertical Mull Option: | <i>Tight Mull</i> |
| Vertical Mull Width: | <i>Standard Joining Mullion</i> |
| Vertical Mull Mull Design Pressure: | <i>20</i> |
| Exterior Paint Grade: | <i>Standard Enduraclad</i> |
| Exterior Color: | <i>Fossil</i> |
| Interior Finish: | <i>Primed</i> |
| Glazing Type: | <i>Insulated</i> |
| Insulated Type: | <i>Dual</i> |
| Glass Strength: | <i>Tempered</i> |
| Insulated Glass Options: | <i>Low-E</i> |
| Low-E Glass Style: | <i>SunDefense™+ Low-E Insulating Glass</i> |
| Gas Filled: | <i>Argon</i> |

| | |
|--|----------------------------------|
| High Altitude: | <i>Non High Altitude</i> |
| Glazing Lite Thickness: | <i>Standard Per Design (3mm)</i> |
| Insulated Glass Overall Thickness: | <i>Standard Per Design</i> |
| Grille Type: | <i>No Grille</i> |
| Attachment Method: | <i>No Attachment Method</i> |
| Jamb Extended Wall Depth: | <i>4-9/16"</i> |
| Wall Depth Application: | <i>Factory Applied</i> |
| Remake?: | <i>No</i> |
| Comment/Room: | <i>Sunroom windows</i> |
| Delivery Method: | <i>In-Store Pick-up</i> |
| Production Time (Does not include transit time): | <i>26</i> |
| Vendor Number: | <i>33070</i> |
| SOS Number: | <i>948260</i> |
| SOS Number Description: | <i>CMC Pella LS Window IHSS</i> |
| Labor SKU: | <i>1168049</i> |
| Customer Service Number: | <i>877-473-5527</i> |
| Combination U-Factor: | <i>0.23</i> |
| U-Factor : | <i>0.23</i> |
| Combination SHGC: | <i>0.24</i> |
| SHGC: | <i>0.24</i> |
| VLT: | <i>0.56</i> |
| CPD: | <i>PEL-N-18-04424-00001</i> |
| Satisfied Energy Star Zones: | <i>North Central</i> |
| Satisfies 2021 IECC® Climate Zone: | <i>Yes</i> |
| Energy Star rating removed. Proceed as-is?: | <i>Yes</i> |
| Performance Class: | <i>AW</i> |
| PG: | <i>60</i> |
| Combination Positive DP Rating: | <i>N/A</i> |
| Calculated Positive DP Rating: | <i>60</i> |
| Combination Negative DP Rating: | <i>N/A</i> |
| Calculated Negative DP Rating: | <i>60</i> |
| FPA: | <i>FL10354</i> |
| STC: | <i>27</i> |
| OITC: | <i>22</i> |
| Overall Rough Opening Width: | <i>48.25</i> |
| Overall Rough Opening Height: | <i>84.5</i> |

1168049 LABOR - SPECIAL SHAPE/PIC -
OVERSIZED:

1168049::LABOR - SPECIAL SHAPE/PIC -
OVERSIZED

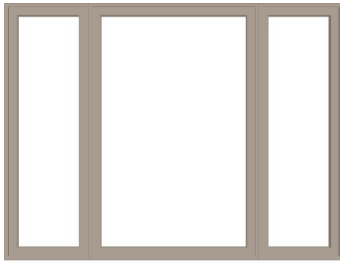

Exterior



Interior

Right side Picture/Casement

Quantity 1

Options

Description: *Pella® Lifestyle Series Casement*

Venting: *Vent*

Number Wide: *3*

Bundle: *Pella® Lifestyle Series Bundle*

Unit Type: *Complete Unit*

Select U.S. ENERGY STAR® Climate
Zone: *South Central*

2021 IECC® Climate Zone for this store
location: *Climate Zone 3*

Exterior Material Type: *Clad*

Sizing: *Keep size*

Standard Width: *Non Standard Width*

Standard Height: *Non Standard Height*

Frame Width: *Answers Differ*

A1 Frame Width: *23.75*

B1 Frame Width: *47.5*

C1 Frame Width: *23.75*

Overall Frame Width: *95*

Overall Frame Height: *72.25*

Rough Opening Width: *95.75*

Rough Opening Height: *73*

Hinged Glass Panel Option: *With Hinged Glass Panel*

Operation / Venting:

A1 Operation / Venting: *Left*

B1 Operation / Venting: *Fixed*

C1 Operation / Venting: *Right*

Base Frame Depth: *5"*

Base Wall Depth: *3 11/16"*

Sill Riser: *Sill Riser Included*

Vertical Mull Type: *Factory Mull*


Vertical Mull Option: *Tight Mull*

Vertical Mull Width: *Standard Joining Mullion*

| | |
|--|-------------------------------------|
| Vertical Mull Mull Design Pressure: | 20 |
| Exterior Paint Grade: | Standard Enduraclad |
| Exterior Color: | Fossil |
| Interior Finish: | Primed |
| Glazing Type: | Insulated |
| Glass Strength: | Tempered |
| Insulated Glass Options: | Low-E |
| Low-E Glass Style: | SunDefense™+ Low-E Insulating Glass |
| Gas Filled: | Argon |
| High Altitude: | Non High Altitude |
| Glazing Lite Thickness: | |
| A1 Glazing Lite Thickness: | STC 5mm/3mm Combination |
| B1 Glazing Lite Thickness: | Standard Per Design (4mm) |
| C1 Glazing Lite Thickness: | STC 5mm/3mm Combination |
| Insulated Glass Overall Thickness: | Standard Per Design |
| Hinge Panel Glass Strength: | Tempered |
| Accessory Option: | No Accessory Option |
| Grille Type: | No Grille |
| Hardware Style: | Fold-Away Crank |
| Hardware Finish: | White |
| Hardware Type: | Wash Hinge Hardware |
| Window Opening Control Device: | No Window Opening Control Device |
| Limited Opening Hardware: | No Limited Opening Hardware |
| Operating Hardware Shipping Option: | Shipped In Unit |
| Screen Option: | Full Screen |
| Screen Color: | White |
| Screen Cloth: | InView™ |
| Screen Shipping Option: | Shipped Separate |
| Attachment Method: | No Attachment Method |
| Jamb Extended Wall Depth: | 4-9/16" |
| Wall Depth Application: | Factory Applied |
| Remake?: | No |
| Comment/Room: | Right side Picture/Casement |
| Delivery Method: | In-Store Pick-up |
| Production Time (Does not include transit time): | 26 |
| Vendor Number: | 33070 |

| | |
|------------------------------------|---|
| SOS Number: | 948260 |
| SOS Number Description: | CMC Pella LS Window IHSS |
| Labor SKU: | 1168046 |
| Customer Service Number: | 877-473-5527 |
| Combination U-Factor: | 0.2 |
| U-Factor : | Answers Differ |
| A1 U-Factor : | 0.20 |
| B1 U-Factor : | 0.19 |
| C1 U-Factor : | 0.20 |
| Combination SHGC: | 0.19 |
| SHGC: | 0.19 |
| VLT: | 0.44 |
| CPD: | Answers Differ |
| A1 CPD: | PEL-N-245-00341-00001 |
| B1 CPD: | PEL-N-244-00285-00001 |
| C1 CPD: | PEL-N-245-00341-00001 |
| Satisfied Energy Star Zones: | Northern,North Central,South Central,Southern |
| Satisfies 2021 IECC® Climate Zone: | Yes |
| Performance Class: | Answers Differ |
| A1 Performance Class: | LC |
| B1 Performance Class: | CW |
| C1 Performance Class: | LC |
| PG: | 50 |
| Combination Positive DP Rating: | N/A |
| Calculated Positive DP Rating: | 50 |
| Combination Negative DP Rating: | N/A |
| Calculated Negative DP Rating: | 50 |
| FPA: | Answers Differ |
| A1 FPA: | FL11865 |
| B1 FPA: | FL11877 |
| C1 FPA: | FL11865 |
| STC: | Answers Differ |
| A1 STC: | 36 |
| B1 STC: | 34 |
| C1 STC: | 36 |
| OITC: | Answers Differ |

| | |
|--|--|
| A1 OITC: | 31 |
| B1 OITC: | 28 |
| C1 OITC: | 31 |
| Overall Rough Opening Width: | 95.75 |
| Overall Rough Opening Height: | 73 |
| 1168046 LABOR - CASEMENT/AWNING OVERSIZED: | 1168046::LABOR - CASEMENT/AWNING OVERSIZED |



Exterior



Interior

Right side Picture/Casement 2

Quantity 1


Options

| | |
|--|---|
| Description: | <i>Pella® Lifestyle Series Casement</i> |
| Venting: | <i>Vent</i> |
| Number Wide: | <i>3</i> |
| Bundle: | <i>Pella® Lifestyle Series Bundle</i> |
| Unit Type: | <i>Complete Unit</i> |
| Select U.S. ENERGY STAR® Climate Zone: | <i>South Central</i> |
| 2021 IECC® Climate Zone for this store location: | <i>Climate Zone 3</i> |
| Exterior Material Type: | <i>Clad</i> |
| Sizing: | <i>Keep size</i> |
| Standard Width: | <i>Non Standard Width</i> |
| Standard Height: | <i>Non Standard Height</i> |
| Frame Width: | <i>Answers Differ</i> |
| A1 Frame Width: | <i>26.75</i> |
| B1 Frame Width: | <i>53.5</i> |
| C1 Frame Width: | <i>26.75</i> |
| Overall Frame Width: | <i>107</i> |
| Overall Frame Height: | <i>72.5</i> |
| Rough Opening Width: | <i>107.75</i> |
| Rough Opening Height: | <i>73.25</i> |
| Hinged Glass Panel Option: | <i>With Hinged Glass Panel</i> |
| Operation / Venting: | |
| A1 Operation / Venting: | <i>Left</i> |
| B1 Operation / Venting: | <i>Fixed</i> |
| C1 Operation / Venting: | <i>Right</i> |
| Base Frame Depth: | <i>5"</i> |


| | |
|-------------------------------------|--|
| Base Wall Depth: | <i>3 11/16"</i> |
| Sill Riser: | <i>Sill Riser Included</i> |
| Vertical Mull Type: | <i>Factory Mull</i> |
| Vertical Mull Option: | <i>Tight Mull</i> |
| Vertical Mull Width: | <i>Standard Joining Mullion</i> |
| Vertical Mull Mull Design Pressure: | <i>20</i> |
| Exterior Paint Grade: | <i>Standard Enduraclad</i> |
| Exterior Color: | <i>Fossil</i> |
| Interior Finish: | <i>Primed</i> |
| Glazing Type: | <i>Insulated</i> |
| Glass Strength: | <i>Tempered</i> |
| Insulated Glass Options: | <i>Low-E</i> |
| Low-E Glass Style: | <i>SunDefense™+ Low-E Insulating Glass</i> |
| Gas Filled: | <i>Argon</i> |
| High Altitude: | <i>Non High Altitude</i> |
| Glazing Lite Thickness: | |
| A1 Glazing Lite Thickness: | <i>STC 5mm/3mm Combination</i> |
| B1 Glazing Lite Thickness: | <i>Standard Per Design (4mm)</i> |
| C1 Glazing Lite Thickness: | <i>STC 5mm/3mm Combination</i> |
| Insulated Glass Overall Thickness: | <i>Standard Per Design</i> |
| Hinge Panel Glass Strength: | <i>Tempered</i> |
| Accessory Option: | <i>No Accessory Option</i> |
| Grille Type: | <i>No Grille</i> |
| Hardware Style: | <i>Fold-Away Crank</i> |
| Hardware Finish: | <i>White</i> |
| Hardware Type: | <i>Wash Hinge Hardware</i> |
| Window Opening Control Device: | <i>No Window Opening Control Device</i> |
| Limited Opening Hardware: | <i>No Limited Opening Hardware</i> |
| Operating Hardware Shipping Option: | <i>Shipped In Unit</i> |
| Screen Option: | <i>Full Screen</i> |
| Screen Color: | <i>White</i> |
| Screen Cloth: | <i>InView™</i> |
| Screen Shipping Option: | <i>Shipped Separate</i> |
| Attachment Method: | <i>No Attachment Method</i> |
| Jamb Extended Wall Depth: | <i>4-9/16"</i> |
| Wall Depth Application: | <i>Factory Applied</i> |
| Remake?: | <i>No</i> |

| | |
|--|--|
| Comment/Room: | <i>Right side Picture/Casement 2</i> |
| Delivery Method: | <i>In-Store Pick-up</i> |
| Production Time (Does not include transit time): | <i>26</i> |
| Vendor Number: | <i>33070</i> |
| SOS Number: | <i>948260</i> |
| SOS Number Description: | <i>CMC Pella LS Window IHSS</i> |
| Labor SKU: | <i>1168046</i> |
| Customer Service Number: | <i>877-473-5527</i> |
| Combination U-Factor: | <i>0.2</i> |
| U-Factor : | <i>Answers Differ</i> |
| A1 U-Factor : | <i>0.20</i> |
| B1 U-Factor : | <i>0.19</i> |
| C1 U-Factor : | <i>0.20</i> |
| Combination SHGC: | <i>0.19</i> |
| SHGC: | <i>0.19</i> |
| VLT: | <i>0.44</i> |
| CPD: | <i>Answers Differ</i> |
| A1 CPD: | <i>PEL-N-245-00341-00001</i> |
| B1 CPD: | <i>PEL-N-244-00285-00001</i> |
| C1 CPD: | <i>PEL-N-245-00341-00001</i> |
| Satisfied Energy Star Zones: | <i>Northern,North Central,South Central,Southern</i> |
| Satisfies 2021 IECC® Climate Zone: | <i>Yes</i> |
| Performance Class: | <i>Answers Differ</i> |
| A1 Performance Class: | <i>LC</i> |
| B1 Performance Class: | <i>CW</i> |
| C1 Performance Class: | <i>LC</i> |
| PG: | <i>50</i> |
| Combination Positive DP Rating: | <i>N/A</i> |
| Calculated Positive DP Rating: | <i>50</i> |
| Combination Negative DP Rating: | <i>N/A</i> |
| Calculated Negative DP Rating: | <i>50</i> |
| FPA: | <i>Answers Differ</i> |
| A1 FPA: | <i>FL11865</i> |
| B1 FPA: | <i>FL11877</i> |
| C1 FPA: | <i>FL11865</i> |
| STC: | <i>Answers Differ</i> |

| | |
|--|--|
| A1 STC: | 36 |
| B1 STC: | 34 |
| C1 STC: | 36 |
| OITC: | Answers Differ |
| A1 OITC: | 31 |
| B1 OITC: | 28 |
| C1 OITC: | 31 |
| Overall Rough Opening Width: | 107.75 |
| Overall Rough Opening Height: | 73.25 |
| 1168046 LABOR - CASEMENT/AWNING OVERSIZED: | 1168046::LABOR - CASEMENT/AWNING OVERSIZED |

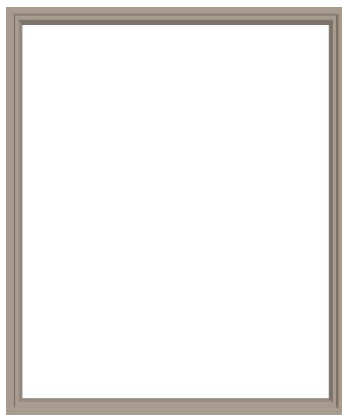

Exterior

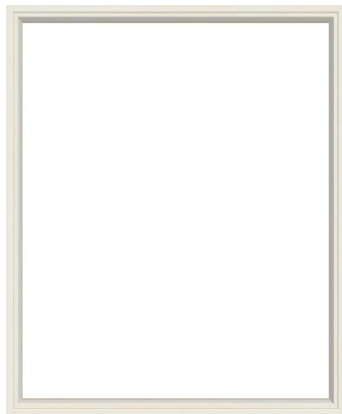

Interior

Masterbed bay picture window


Quantity 1

Options

| | |
|--|--|
| Description: | <i>Pella® Lifestyle Series Rectangle</i> |
| Number Wide: | 1 |
| Bundle: | <i>Pella® Lifestyle Series Bundle</i> |
| Unit Type: | <i>Complete Unit</i> |
| Performance Options: | <i>Standard</i> |
| Select U.S. ENERGY STAR® Climate Zone: | <i>South Central</i> |
| 2021 IECC® Climate Zone for this store location: | <i>Climate Zone 3</i> |
| Exterior Material Type: | <i>Clad</i> |
| Sizing: | <i>Keep size</i> |
| Standard Width: | <i>Non Standard Width</i> |
| Standard Height: | <i>Non Standard Height</i> |
| Frame Width: | <i>57.5</i> |
| Overall Frame Width: | <i>57.5</i> |
| Overall Frame Height: | <i>69.5</i> |
| Rough Opening Width: | <i>58.25</i> |
| Rough Opening Height: | <i>70.25</i> |
| Hinged Glass Panel Option: | <i>Without Hinged Glass Panel</i> |
| Operation / Venting: | <i>Fixed Frame</i> |
| Base Frame Depth: | <i>5"</i> |
| Base Wall Depth: | <i>3 11/16"</i> |
| Exterior Paint Grade: | <i>Standard Enduraclad</i> |

| | |
|--|--|
| Exterior Color: | <i>Fossil</i> |
| Interior Finish: | <i>Primed</i> |
| Glazing Type: | <i>Insulated</i> |
| Insulated Type: | <i>Dual</i> |
| Glass Strength: | <i>Tempered</i> |
| Insulated Glass Options: | <i>Low-E</i> |
| Low-E Glass Style: | <i>SunDefense™+ Low-E Insulating Glass</i> |
| Gas Filled: | <i>Argon</i> |
| High Altitude: | <i>Non High Altitude</i> |
| Glazing Lite Thickness: | <i>Standard Per Design (5mm)</i> |
| Insulated Glass Overall Thickness: | <i>Standard Per Design</i> |
| Grille Type: | <i>No Grille</i> |
| Attachment Method: | <i>No Attachment Method</i> |
| Jamb Extended Wall Depth: | <i>4-9/16"</i> |
| Wall Depth Application: | <i>Factory Applied</i> |
| Remake?: | <i>No</i> |
| Comment/Room: | <i>Masterbed bay picture window</i> |
| Delivery Method: | <i>In-Store Pick-up</i> |
| Production Time (Does not include transit time): | <i>21</i> |
| Vendor Number: | <i>33070</i> |
| SOS Number: | <i>948260</i> |
| SOS Number Description: | <i>CMC Pella LS Window IHSS</i> |
| Labor SKU: | <i>1168049</i> |
| Customer Service Number: | <i>877-473-5527</i> |
| Combination U-Factor: | <i>0.23</i> |
| U-Factor : | <i>0.23</i> |
| Combination SHGC: | <i>0.24</i> |
| SHGC: | <i>0.24</i> |
| VLT: | <i>0.55</i> |
| CPD: | <i>PEL-N-18-04456-00001</i> |
| Satisfied Energy Star Zones: | <i>North Central</i> |
| Satisfies 2021 IECC® Climate Zone: | <i>Yes</i> |
| Energy Star rating removed. Proceed as-is?: | <i>Yes</i> |
| Performance Class: | <i>AW</i> |
| PG: | <i>60</i> |
| Calculated Positive DP Rating: | <i>60</i> |

| | |
|--|--|
| Calculated Negative DP Rating: | 60 |
| FPA: | FL10354 |
| STC: | 28 |
| OITC: | 24 |
| Overall Rough Opening Width: | 58.25 |
| Overall Rough Opening Height: | 70.25 |
| 1168049 LABOR - SPECIAL SHAPE/PIC - OVERSIZED: | 1168049::LABOR - SPECIAL SHAPE/PIC - OVERSIZED |

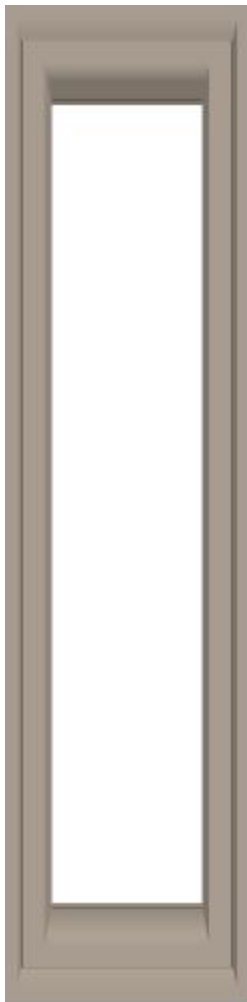

Exterior

Masterbed casements

Quantity 2

Options


| | |
|--|---|
| Description: | <i>Pella® Lifestyle Series Casement</i> |
| Number Wide: | 1 |
| Bundle: | <i>Pella® Lifestyle Series Bundle</i> |
| Unit Type: | <i>Complete Unit</i> |
| Select U.S. ENERGY STAR® Climate Zone: | <i>South Central</i> |
| 2021 IECC® Climate Zone for this store location: | <i>Climate Zone 3</i> |
| Exterior Material Type: | <i>Clad</i> |
| Sizing: | <i>Keep size</i> |
| Standard Width: | <i>Non Standard Width</i> |
| Standard Height: | <i>Non Standard Height</i> |
| Frame Width: | 17 |
| Overall Frame Width: | 17 |
| Overall Frame Height: | 69.5 |
| Rough Opening Width: | 17.75 |
| Rough Opening Height: | 70.25 |
| Hinged Glass Panel Option: | <i>Without Hinged Glass Panel</i> |
| Operation / Venting: | <i>Left</i> |
| Base Frame Depth: | 5" |
| Base Wall Depth: | 3 11/16" |
| Exterior Paint Grade: | <i>Standard Enduraclad</i> |
| Exterior Color: | <i>Fossil</i> |
| Interior Finish: | <i>Primed</i> |
| Glazing Type: | <i>Insulated</i> |
| Glass Strength: | <i>Tempered</i> |



Interior

| | |
|--|---|
| Insulated Glass Options: | <i>Low-E</i> |
| Low-E Glass Style: | <i>SunDefense™+ Low-E Insulating Glass</i> |
| Gas Filled: | <i>Argon</i> |
| High Altitude: | <i>Non High Altitude</i> |
| Glazing Lite Thickness: | <i>STC 5mm/3mm Combination</i> |
| Insulated Glass Overall Thickness: | <i>Standard Per Design</i> |
| Grille Type: | <i>No Grille</i> |
| Hardware Style: | <i>Fold-Away Crank</i> |
| Hardware Finish: | <i>White</i> |
| Hardware Type: | <i>Wash Hinge Hardware</i> |
| Window Opening Control Device: | <i>No Window Opening Control Device</i> |
| Limited Opening Hardware: | <i>No Limited Opening Hardware</i> |
| Operating Hardware Shipping Option: | <i>Shipped In Unit</i> |
| Screen Option: | <i>Full Screen</i> |
| Screen Color: | <i>White</i> |
| Screen Cloth: | <i>InView™</i> |
| Screen Shipping Option: | <i>Shipped Separate</i> |
| Attachment Method: | <i>No Attachment Method</i> |
| Jamb Extended Wall Depth: | <i>4-9/16"</i> |
| Wall Depth Application: | <i>Factory Applied</i> |
| Remake?: | <i>No</i> |
| Comment/Room: | <i>Masterbed casements</i> |
| Delivery Method: | <i>In-Store Pick-up</i> |
| Production Time (Does not include transit time): | <i>21</i> |
| Vendor Number: | <i>33070</i> |
| SOS Number: | <i>948260</i> |
| SOS Number Description: | <i>CMC Pella LS Window IHSS</i> |
| Labor SKU: | <i>1168045</i> |
| Customer Service Number: | <i>877-473-5527</i> |
| Combination U-Factor: | <i>0.25</i> |
| U-Factor : | <i>0.25</i> |
| Combination SHGC: | <i>0.2</i> |
| SHGC: | <i>0.20</i> |
| VLT: | <i>0.46</i> |
| CPD: | <i>PEL-N-14-01105-00001</i> |
| Satisfied Energy Star Zones: | <i>North Central,South Central,Southern</i> |

| | |
|---|---|
| Satisfies 2021 IECC® Climate Zone: | Yes |
| Performance Class: | LC |
| PG: | 50 |
| Calculated Positive DP Rating: | 50 |
| Calculated Negative DP Rating: | 50 |
| FPA: | FL20675 |
| STC: | 31 |
| OITC: | 26 |
| Clear Opening Width: | 7.25 |
| Clear Opening Height: | 65.375 |
| Clear Opening Area: | 3.29144955 |
| Overall Rough Opening Width: | 17.75 |
| Overall Rough Opening Height: | 70.25 |
| 1168045 LABOR - CASEMENT/AWNING WINDOW: | 1168045::LABOR - CASEMENT/AWNING WINDOW |



Exterior



Interior

Materbath casements

Quantity 1

Options

| | |
|--|---|
| Description: | <i>Pella® Lifestyle Series Casement</i> |
| Venting: | <i>Vent</i> |
| Number Wide: | <i>2</i> |
| Bundle: | <i>Pella® Lifestyle Series Bundle</i> |
| Unit Type: | <i>Complete Unit</i> |
| Select U.S. ENERGY STAR® Climate Zone: | <i>South Central</i> |
| 2021 IECC® Climate Zone for this store location: | <i>Climate Zone 3</i> |
| Exterior Material Type: | <i>Clad</i> |
| Sizing: | <i>Keep size</i> |
| Standard Width: | <i>Non Standard Width</i> |
| Standard Height: | <i>Non Standard Height</i> |
| Frame Width: | <i>29.25</i> |
| Overall Frame Width: | <i>58.5</i> |
| Overall Frame Height: | <i>46.5</i> |
| Rough Opening Width: | <i>59.25</i> |
| Rough Opening Height: | <i>47.25</i> |
| Hinged Glass Panel Option: | <i>Without Hinged Glass Panel</i> |

| | |
|--|--|
| Operation / Venting: | <i>Left</i> |
| Base Frame Depth: | <i>5"</i> |
| Base Wall Depth: | <i>3 11/16"</i> |
| Vertical Mull Type: | <i>Factory Mull</i> |
| Vertical Mull Option: | <i>Tight Mull</i> |
| Vertical Mull Width: | <i>Standard Joining Mullion</i> |
| Vertical Mull Mull Design Pressure: | <i>20</i> |
| Exterior Paint Grade: | <i>Standard Enduraclad</i> |
| Exterior Color: | <i>Fossil</i> |
| Interior Finish: | <i>Primed</i> |
| Glazing Type: | <i>Insulated</i> |
| Glass Strength: | <i>Tempered</i> |
| Insulated Glass Options: | <i>Low-E</i> |
| Low-E Glass Style: | <i>SunDefense™+ Low-E Insulating Glass</i> |
| Gas Filled: | <i>Argon</i> |
| High Altitude: | <i>Non High Altitude</i> |
| Glazing Lite Thickness: | <i>STC 5mm/3mm Combination</i> |
| Insulated Glass Overall Thickness: | <i>Standard Per Design</i> |
| Grille Type: | <i>No Grille</i> |
| Hardware Style: | <i>Fold-Away Crank</i> |
| Hardware Finish: | <i>White</i> |
| Hardware Type: | <i>Wash Hinge Hardware</i> |
| Window Opening Control Device: | <i>No Window Opening Control Device</i> |
| Limited Opening Hardware: | <i>No Limited Opening Hardware</i> |
| Operating Hardware Shipping Option: | <i>Shipped In Unit</i> |
| Screen Option: | <i>Full Screen</i> |
| Screen Color: | <i>White</i> |
| Screen Cloth: | <i>InView™</i> |
| Screen Shipping Option: | <i>Shipped Separate</i> |
| Attachment Method: | <i>No Attachment Method</i> |
| Jamb Extended Wall Depth: | <i>4-9/16"</i> |
| Wall Depth Application: | <i>Factory Applied</i> |
| Remake?: | <i>No</i> |
| Comment/Room: | <i>Materbath casements</i> |
| Delivery Method: | <i>In-Store Pick-up</i> |
| Production Time (Does not include transit time): | <i>26</i> |


| | |
|---|---|
| Vendor Number: | 33070 |
| SOS Number: | 948260 |
| SOS Number Description: | CMC Pella LS Window IHSS |
| Labor SKU: | 1168045 |
| Customer Service Number: | 877-473-5527 |
| Combination U-Factor: | 0.25 |
| U-Factor : | 0.25 |
| Combination SHGC: | 0.2 |
| SHGC: | 0.20 |
| VLT: | 0.46 |
| CPD: | PEL-N-14-01105-00001 |
| Satisfied Energy Star Zones: | North Central,South Central,Southern |
| Satisfies 2021 IECC® Climate Zone: | Yes |
| Performance Class: | LC |
| PG: | 50 |
| Combination Positive DP Rating: | N/A |
| Calculated Positive DP Rating: | 50 |
| Combination Negative DP Rating: | N/A |
| Calculated Negative DP Rating: | 50 |
| FPA: | FL20675 |
| STC: | 31 |
| OITC: | 26 |
| Overall Rough Opening Width: | 59.25 |
| Overall Rough Opening Height: | 47.25 |
| 1168045 LABOR - CASEMENT/AWNING WINDOW: | 1168045::LABOR - CASEMENT/AWNING WINDOW |

Masterbath single casement

Quantity 1

Options

| | |
|--|----------------------------------|
| Description: | Pella® Lifestyle Series Casement |
| Number Wide: | 1 |
| Bundle: | Pella® Lifestyle Series Bundle |
| Unit Type: | Complete Unit |
| Select U.S. ENERGY STAR® Climate Zone: | South Central |
| 2021 IECC® Climate Zone for this store location: | Climate Zone 3 |

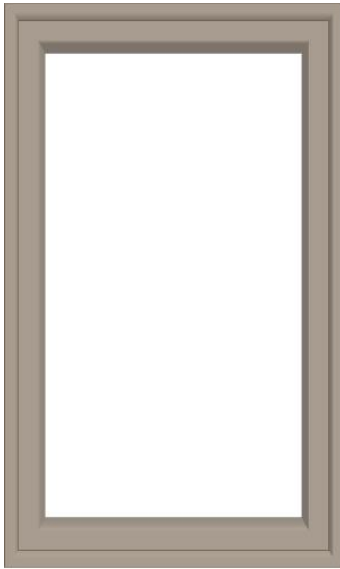


Exterior



Interior

| | |
|-------------------------------------|--|
| Exterior Material Type: | <i>Clad</i> |
| Sizing: | <i>Keep size</i> |
| Standard Width: | <i>Non Standard Width</i> |
| Standard Height: | <i>Non Standard Height</i> |
| Frame Width: | <i>28</i> |
| Overall Frame Width: | <i>28</i> |
| Overall Frame Height: | <i>46.75</i> |
| Rough Opening Width: | <i>28.75</i> |
| Rough Opening Height: | <i>47.5</i> |
| Hinged Glass Panel Option: | <i>Without Hinged Glass Panel</i> |
| Operation / Venting: | <i>Left</i> |
| Base Frame Depth: | <i>5"</i> |
| Base Wall Depth: | <i>3 11/16"</i> |
| Exterior Paint Grade: | <i>Standard Enduraclad</i> |
| Exterior Color: | <i>Fossil</i> |
| Interior Finish: | <i>Primed</i> |
| Glazing Type: | <i>Insulated</i> |
| Glass Strength: | <i>Tempered</i> |
| Insulated Glass Options: | <i>Low-E</i> |
| Low-E Glass Style: | <i>SunDefense™+ Low-E Insulating Glass</i> |
| Gas Filled: | <i>Argon</i> |
| High Altitude: | <i>Non High Altitude</i> |
| Glazing Lite Thickness: | <i>STC 5mm/3mm Combination</i> |
| Insulated Glass Overall Thickness: | <i>Standard Per Design</i> |
| Grille Type: | <i>No Grille</i> |
| Hardware Style: | <i>Fold-Away Crank</i> |
| Hardware Finish: | <i>White</i> |
| Hardware Type: | <i>Wash Hinge Hardware</i> |
| Window Opening Control Device: | <i>No Window Opening Control Device</i> |
| Limited Opening Hardware: | <i>No Limited Opening Hardware</i> |
| Operating Hardware Shipping Option: | <i>Shipped In Unit</i> |
| Screen Option: | <i>Full Screen</i> |
| Screen Color: | <i>White</i> |
| Screen Cloth: | <i>InView™</i> |
| Screen Shipping Option: | <i>Shipped Separate</i> |
| Attachment Method: | <i>No Attachment Method</i> |
| Jamb Extended Wall Depth: | <i>4-9/16"</i> |

| | |
|--|--|
| Wall Depth Application: | <i>Factory Applied</i> |
| Remake?: | <i>No</i> |
| Comment/Room: | <i>Masterbath single casement</i> |
| Delivery Method: | <i>In-Store Pick-up</i> |
| Production Time (Does not include transit time): | <i>21</i> |
| Vendor Number: | <i>33070</i> |
| SOS Number: | <i>948260</i> |
| SOS Number Description: | <i>CMC Pella LS Window IHSS</i> |
| Labor SKU: | <i>1168045</i> |
| Customer Service Number: | <i>877-473-5527</i> |
| Combination U-Factor: | <i>0.25</i> |
| U-Factor : | <i>0.25</i> |
| Combination SHGC: | <i>0.2</i> |
| SHGC: | <i>0.20</i> |
| VLT: | <i>0.46</i> |
| CPD: | <i>PEL-N-14-01105-00001</i> |
| Satisfied Energy Star Zones: | <i>North Central,South Central,Southern</i> |
| Satisfies 2021 IECC® Climate Zone: | <i>Yes</i> |
| Performance Class: | <i>LC</i> |
| PG: | <i>50</i> |
| Calculated Positive DP Rating: | <i>50</i> |
| Calculated Negative DP Rating: | <i>50</i> |
| FPA: | <i>FL20675</i> |
| STC: | <i>31</i> |
| OITC: | <i>26</i> |
| Clear Opening Width: | <i>18.25</i> |
| Clear Opening Height: | <i>42.625</i> |
| Clear Opening Area: | <i>5.402127</i> |
| Overall Rough Opening Width: | <i>28.75</i> |
| Overall Rough Opening Height: | <i>47.5</i> |
| 1168045 LABOR - CASEMENT/AWNING WINDOW: | <i>1168045::LABOR - CASEMENT/AWNING WINDOW</i> |

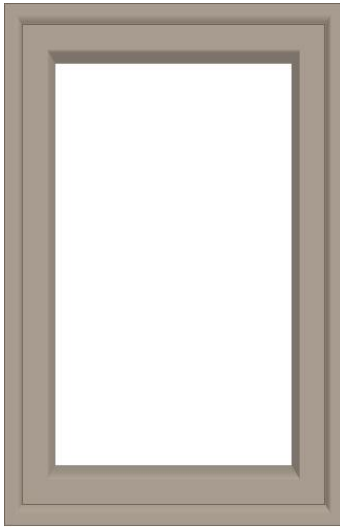

Exterior



Interior

Masterbath single casement 2


Quantity 1

Options


| | |
|--|--|
| Description: | <i>Pella® Lifestyle Series Casement</i> |
| Number Wide: | <i>1</i> |
| Bundle: | <i>Pella® Lifestyle Series Bundle</i> |
| Unit Type: | <i>Complete Unit</i> |
| Select U.S. ENERGY STAR® Climate Zone: | <i>South Central</i> |
| 2021 IECC® Climate Zone for this store location: | <i>Climate Zone 3</i> |
| Exterior Material Type: | <i>Clad</i> |
| Sizing: | <i>Keep size</i> |
| Standard Width: | <i>Non Standard Width</i> |
| Standard Height: | <i>Non Standard Height</i> |
| Frame Width: | <i>22</i> |
| Overall Frame Width: | <i>22</i> |
| Overall Frame Height: | <i>34</i> |
| Rough Opening Width: | <i>22.75</i> |
| Rough Opening Height: | <i>34.75</i> |
| Hinged Glass Panel Option: | <i>Without Hinged Glass Panel</i> |
| Operation / Venting: | <i>Left</i> |
| Base Frame Depth: | <i>5"</i> |
| Base Wall Depth: | <i>3 11/16"</i> |
| Exterior Paint Grade: | <i>Standard Enduraclad</i> |
| Exterior Color: | <i>Fossil</i> |
| Interior Finish: | <i>Primed</i> |
| Glazing Type: | <i>Insulated</i> |
| Glass Strength: | <i>Annealed</i> |
| Insulated Glass Options: | <i>Low-E</i> |
| Low-E Glass Style: | <i>SunDefense™+ Low-E Insulating Glass</i> |
| Gas Filled: | <i>Argon</i> |
| High Altitude: | <i>Non High Altitude</i> |
| Glazing Lite Thickness: | <i>STC 5mm/3mm Combination</i> |
| Insulated Glass Overall Thickness: | <i>Standard Per Design</i> |
| Grille Type: | <i>No Grille</i> |
| Hardware Style: | <i>Fold-Away Crank</i> |
| Hardware Finish: | <i>White</i> |

| | |
|--|---|
| Hardware Type: | <i>Wash Hinge Hardware</i> |
| Window Opening Control Device: | <i>No Window Opening Control Device</i> |
| Limited Opening Hardware: | <i>No Limited Opening Hardware</i> |
| Operating Hardware Shipping Option: | <i>Shipped In Unit</i> |
| Screen Option: | <i>Full Screen</i> |
| Screen Color: | <i>White</i> |
| Screen Cloth: | <i>InView™</i> |
| Screen Shipping Option: | <i>Shipped Separate</i> |
| Attachment Method: | <i>No Attachment Method</i> |
| Jamb Extended Wall Depth: | <i>4-9/16"</i> |
| Wall Depth Application: | <i>Factory Applied</i> |
| Remake?: | <i>No</i> |
| Comment/Room: | <i>Masterbath single casement 2</i> |
| Delivery Method: | <i>In-Store Pick-up</i> |
| Production Time (Does not include transit time): | <i>21</i> |
| Vendor Number: | <i>33070</i> |
| SOS Number: | <i>948260</i> |
| SOS Number Description: | <i>CMC Pella LS Window IHSS</i> |
| Labor SKU: | <i>1168045</i> |
| Customer Service Number: | <i>877-473-5527</i> |
| Combination U-Factor: | <i>0.25</i> |
| U-Factor : | <i>0.25</i> |
| Combination SHGC: | <i>0.2</i> |
| SHGC: | <i>0.20</i> |
| VLT: | <i>0.46</i> |
| CPD: | <i>PEL-N-14-01105-00001</i> |
| Satisfied Energy Star Zones: | <i>North Central,South Central,Southern</i> |
| Satisfies 2021 IECC® Climate Zone: | <i>Yes</i> |
| Performance Class: | <i>LC</i> |
| PG: | <i>50</i> |
| Calculated Positive DP Rating: | <i>50</i> |
| Calculated Negative DP Rating: | <i>50</i> |
| FPA: | <i>FL20675</i> |
| STC: | <i>31</i> |
| OITC: | <i>26</i> |
| Clear Opening Width: | <i>12.25</i> |

| | |
|---|---|
| Clear Opening Height: | 29.875 |
| Clear Opening Area: | 2.54144955 |
| Overall Rough Opening Width: | 22.75 |
| Overall Rough Opening Height: | 34.75 |
| 1168045 LABOR - CASEMENT/AWNING WINDOW: | 1168045::LABOR - CASEMENT/AWNING WINDOW |

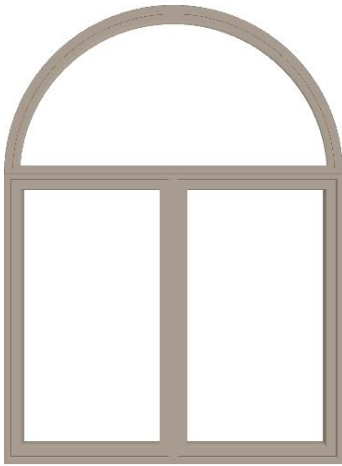

Exterior

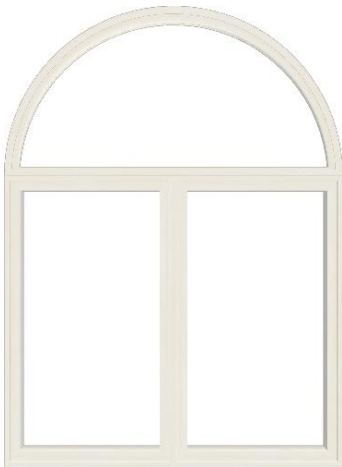

Interior

Upstairs twin casement w/transom

Quantity 1

Options


| | |
|--|---|
| Description: | <i>Pella® Lifestyle Series Vent CM Springline Half Circle Over 2 Wide</i> |
| Venting: | <i>Vent CM Springline Combinations</i> |
| Looks: | <i>Half Circle Over 2 Wide</i> |
| Bundle: | <i>Pella® Lifestyle Series Bundle</i> |
| Unit Type: | <i>Complete Unit</i> |
| Performance Options: | <i>Standard</i> |
| Select U.S. ENERGY STAR® Climate Zone: | <i>South Central</i> |
| 2021 IECC® Climate Zone for this store location: | <i>Climate Zone 3</i> |
| Exterior Material Type: | <i>Clad</i> |
| Look Width: | <i>59.5</i> |
| Look Height: | <i>80.75</i> |
| Top Row Height: | <i>29.75</i> |
| Frame Width: | <i>Answers Differ</i> |
| A1 Frame Width: | <i>29.75</i> |
| B1 Frame Width: | <i>29.75</i> |
| A2 Frame Width: | <i>59.5</i> |
| A1 Frame Height: | <i>51</i> |
| B1 Frame Height: | <i>51</i> |
| A2 Frame Height: | <i>29.75</i> |
| Frame Radius: | <i>29.75</i> |
| Overall Frame Width: | <i>59.5</i> |
| Overall Frame Height: | <i>80.75</i> |
| Overall Frame Short Side: | <i>51</i> |
| Overall Frame Radius: | <i>29.75</i> |
| Hinged Glass Panel Option: | <i>Without Hinged Glass Panel</i> |

Operation / Venting:


| | |
|---------------------------------------|--|
| A1 Operation / Venting: | <i>Left</i> |
| B1 Operation / Venting: | <i>Right</i> |
| A2 Operation / Venting: | <i>Fixed Frame</i> |
| Base Frame Depth: | <i>5"</i> |
| Base Wall Depth: | <i>3 11/16"</i> |
| Horizontal Mull Type: | <i>Factory Mull</i> |
| Vertical Mull Type: | <i>Factory Mull</i> |
| Horizontal Mull Option: | <i>Tight Mull</i> |
| Vertical Mull Option: | <i>Tight Mull</i> |
| Horizontal Mull Height: | <i>Reinforcing Plate</i> |
| Vertical Mull Width: | <i>Standard Joining Mullion</i> |
| Horizontal Mull Mull Design Pressure: | <i>50</i> |
| Vertical Mull Mull Design Pressure: | <i>50</i> |
| Exterior Paint Grade: | <i>Standard Enduraclad</i> |
| Exterior Color: | <i>Fossil</i> |
| Interior Finish: | <i>Primed</i> |
| Glazing Type: | <i>Insulated</i> |
| Insulated Type: | <i>Dual</i> |
| Glass Strength: | <i>Tempered</i> |
| Insulated Glass Options: | <i>Low-E</i> |
| Low-E Glass Style: | <i>SunDefense™+ Low-E Insulating Glass</i> |
| Gas Filled: | <i>Argon</i> |
| High Altitude: | <i>Non High Altitude</i> |
| Glazing Lite Thickness: | |
| A1 Glazing Lite Thickness: | <i>STC 5mm/3mm Combination</i> |
| B1 Glazing Lite Thickness: | <i>STC 5mm/3mm Combination</i> |
| A2 Glazing Lite Thickness: | <i>Standard Per Design (3mm)</i> |
| Insulated Glass Overall Thickness: | <i>Standard Per Design</i> |
| Grille Type: | <i>No Grille</i> |
| Hardware Style: | <i>Fold-Away Crank</i> |
| Hardware Finish: | <i>White</i> |
| Hardware Type: | <i>Wash Hinge Hardware</i> |
| Window Opening Control Device: | <i>No Window Opening Control Device</i> |
| Limited Opening Hardware: | <i>No Limited Opening Hardware</i> |
| Operating Hardware Shipping Option: | <i>Shipped In Unit</i> |
| Screen Option: | <i>Full Screen</i> |

| | |
|--|---|
| Screen Color: | <i>White</i> |
| Screen Cloth: | <i>InView™</i> |
| Screen Shipping Option: | <i>Shipped Separate</i> |
| Attachment Method: | <i>No Attachment Method</i> |
| Jamb Extended Wall Depth: | <i>4-9/16"</i> |
| Wall Depth Application: | <i>Factory Applied</i> |
| Casing: | <i>No Interior Trim</i> |
| Remake?: | <i>No</i> |
| Comment/Room: | <i>Upstairs twin casement w/transom</i> |
| Delivery Method: | <i>In-Store Pick-up</i> |
| Production Time (Does not include transit time): | <i>26</i> |
| Vendor Number: | <i>33070</i> |
| SOS Number: | <i>948260</i> |
| SOS Number Description: | <i>CMC Pella LS Window IHSS</i> |
| Labor SKU: | <i>1168046</i> |
| Customer Service Number: | <i>877-473-5527</i> |
| Combination U-Factor: | <i>0.25</i> |
| U-Factor : | <i>Answers Differ</i> |
| A1 U-Factor : | <i>0.25</i> |
| B1 U-Factor : | <i>0.25</i> |
| A2 U-Factor : | <i>0.23</i> |
| Combination SHGC: | <i>0.24</i> |
| SHGC: | <i>Answers Differ</i> |
| A1 SHGC: | <i>0.20</i> |
| B1 SHGC: | <i>0.20</i> |
| A2 SHGC: | <i>0.24</i> |
| VLT: | <i>Answers Differ</i> |
| A1 VLT: | <i>0.46</i> |
| B1 VLT: | <i>0.46</i> |
| A2 VLT: | <i>0.56</i> |
| CPD: | <i>Answers Differ</i> |
| A1 CPD: | <i>PEL-N-14-01105-00001</i> |
| B1 CPD: | <i>PEL-N-14-01105-00001</i> |
| A2 CPD: | <i>PEL-N-18-04424-00001</i> |
| Satisfied Energy Star Zones: | <i>Answers Differ</i> |
| A1 Satisfied Energy Star Zones: | <i>North Central,South Central,Southern</i> |

| | |
|---|---|
| B1 Satisfied Energy Star Zones: | <i>North Central,South Central,Southern</i> |
| A2 Satisfied Energy Star Zones: | <i>North Central</i> |
| Satisfies 2021 IECC® Climate Zone: | <i>Yes</i> |
| Energy Star rating removed. Proceed as-is?: | <i>Yes</i> |
| Performance Class: | <i>Answers Differ</i> |
| A1 Performance Class: | <i>LC</i> |
| B1 Performance Class: | <i>LC</i> |
| A2 Performance Class: | <i>AW</i> |
| PG: | <i>Answers Differ</i> |
| A1 PG: | <i>50</i> |
| B1 PG: | <i>50</i> |
| A2 PG: | <i>90</i> |
| Combination Positive DP Rating: | <i>N/A</i> |
| Calculated Positive DP Rating: | <i>Answers Differ</i> |
| A1 Calculated Positive DP Rating: | <i>50</i> |
| B1 Calculated Positive DP Rating: | <i>50</i> |
| A2 Calculated Positive DP Rating: | <i>90</i> |
| Combination Negative DP Rating: | <i>N/A</i> |
| Calculated Negative DP Rating: | <i>Answers Differ</i> |
| A1 Calculated Negative DP Rating: | <i>50</i> |
| B1 Calculated Negative DP Rating: | <i>50</i> |
| A2 Calculated Negative DP Rating: | <i>90</i> |
| FPA: | <i>Answers Differ</i> |
| A1 FPA: | <i>FL20675</i> |
| B1 FPA: | <i>FL20675</i> |
| A2 FPA: | <i>FL10354</i> |
| STC: | <i>31</i> |
| OITC: | <i>26</i> |
| Overall Rough Opening Width: | <i>60.25</i> |
| Overall Rough Opening Height: | <i>81.5</i> |
| 1168046 LABOR - CASEMENT/AWNING OVERSIZED: | <i>1168046::LABOR - CASEMENT/AWNING OVERSIZED</i> |

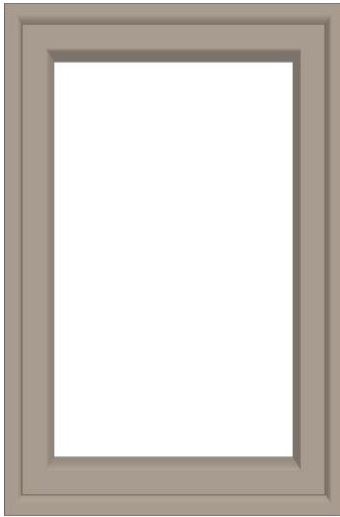

Exterior

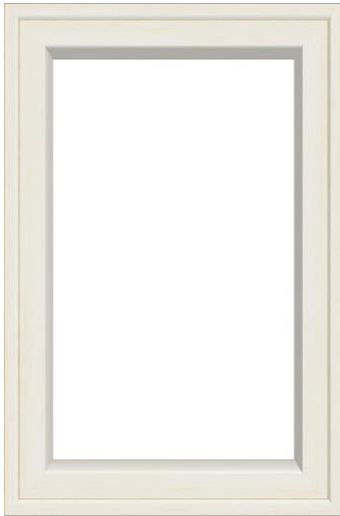

Interior

Upstairs bath casement


Quantity 2

Options

| | |
|--|--|
| Description: | <i>Pella® Lifestyle Series Casement</i> |
| Number Wide: | <i>1</i> |
| Bundle: | <i>Pella® Lifestyle Series Bundle</i> |
| Unit Type: | <i>Complete Unit</i> |
| Select U.S. ENERGY STAR® Climate Zone: | <i>South Central</i> |
| 2021 IECC® Climate Zone for this store location: | <i>Climate Zone 3</i> |
| Exterior Material Type: | <i>Clad</i> |
| Sizing: | <i>Keep size</i> |
| Standard Width: | <i>Non Standard Width</i> |
| Standard Height: | <i>Non Standard Height</i> |
| Frame Width: | <i>22.5</i> |
| Overall Frame Width: | <i>22.5</i> |
| Overall Frame Height: | <i>34</i> |
| Rough Opening Width: | <i>23.25</i> |
| Rough Opening Height: | <i>34.75</i> |
| Hinged Glass Panel Option: | <i>Without Hinged Glass Panel</i> |
| Operation / Venting: | <i>Left</i> |
| Base Frame Depth: | <i>5"</i> |
| Base Wall Depth: | <i>3 11/16"</i> |
| Exterior Paint Grade: | <i>Standard Enduraclad</i> |
| Exterior Color: | <i>Fossil</i> |
| Interior Finish: | <i>Primed</i> |
| Glazing Type: | <i>Insulated</i> |
| Glass Strength: | <i>Tempered</i> |
| Insulated Glass Options: | <i>Low-E</i> |
| Low-E Glass Style: | <i>SunDefense™+ Low-E Insulating Glass</i> |
| Gas Filled: | <i>Argon</i> |
| High Altitude: | <i>Non High Altitude</i> |
| Glazing Lite Thickness: | <i>STC 5mm/3mm Combination</i> |
| Insulated Glass Overall Thickness: | <i>Standard Per Design</i> |
| Grille Type: | <i>No Grille</i> |
| Hardware Style: | <i>Fold-Away Crank</i> |
| Hardware Finish: | <i>Champagne</i> |

| | |
|--|---|
| Hardware Type: | <i>Wash Hinge Hardware</i> |
| Window Opening Control Device: | <i>No Window Opening Control Device</i> |
| Limited Opening Hardware: | <i>No Limited Opening Hardware</i> |
| Operating Hardware Shipping Option: | <i>Shipped In Unit</i> |
| Screen Option: | <i>Full Screen</i> |
| Screen Color: | <i>White</i> |
| Screen Cloth: | <i>InView™</i> |
| Screen Shipping Option: | <i>Shipped Separate</i> |
| Attachment Method: | <i>No Attachment Method</i> |
| Jamb Extended Wall Depth: | <i>4-9/16"</i> |
| Wall Depth Application: | <i>Factory Applied</i> |
| Remake?: | <i>No</i> |
| Comment/Room: | <i>Upstairs bath casement</i> |
| Delivery Method: | <i>In-Store Pick-up</i> |
| Production Time (Does not include transit time): | <i>21</i> |
| Vendor Number: | <i>33070</i> |
| SOS Number: | <i>948260</i> |
| SOS Number Description: | <i>CMC Pella LS Window IHSS</i> |
| Labor SKU: | <i>1168045</i> |
| Customer Service Number: | <i>877-473-5527</i> |
| Combination U-Factor: | <i>0.25</i> |
| U-Factor : | <i>0.25</i> |
| Combination SHGC: | <i>0.2</i> |
| SHGC: | <i>0.20</i> |
| VLT: | <i>0.46</i> |
| CPD: | <i>PEL-N-14-01105-00001</i> |
| Satisfied Energy Star Zones: | <i>North Central,South Central,Southern</i> |
| Satisfies 2021 IECC® Climate Zone: | <i>Yes</i> |
| Performance Class: | <i>LC</i> |
| PG: | <i>50</i> |
| Calculated Positive DP Rating: | <i>50</i> |
| Calculated Negative DP Rating: | <i>50</i> |
| FPA: | <i>FL20675</i> |
| STC: | <i>31</i> |
| OITC: | <i>26</i> |
| Clear Opening Width: | <i>12.75</i> |

| | |
|---|---|
| Clear Opening Height: | 29.875 |
| Clear Opening Area: | 2.64518237 |
| Overall Rough Opening Width: | 23.25 |
| Overall Rough Opening Height: | 34.75 |
| 1168045 LABOR - CASEMENT/AWNING WINDOW: | 1168045::LABOR - CASEMENT/AWNING WINDOW |



Exterior



Interior

Upstairs casements


Quantity 1

Options

| | |
|--|---|
| Description: | <i>Pella® Lifestyle Series Casement</i> |
| Venting: | <i>Vent</i> |
| Number Wide: | <i>2</i> |
| Bundle: | <i>Pella® Lifestyle Series Bundle</i> |
| Unit Type: | <i>Complete Unit</i> |
| Select U.S. ENERGY STAR® Climate Zone: | <i>South Central</i> |
| 2021 IECC® Climate Zone for this store location: | <i>Climate Zone 3</i> |
| Exterior Material Type: | <i>Clad</i> |
| Sizing: | <i>Keep size</i> |
| Standard Width: | <i>Non Standard Width</i> |
| Standard Height: | <i>Non Standard Height</i> |
| Frame Width: | <i>23</i> |
| Overall Frame Width: | <i>46</i> |
| Overall Frame Height: | <i>46</i> |
| Rough Opening Width: | <i>46.75</i> |
| Rough Opening Height: | <i>46.75</i> |
| Hinged Glass Panel Option: | <i>Without Hinged Glass Panel</i> |
| Operation / Venting: | <i>Left</i> |
| Base Frame Depth: | <i>5"</i> |
| Base Wall Depth: | <i>3 11/16"</i> |
| Vertical Mull Type: | <i>Factory Mull</i> |
| Vertical Mull Option: | <i>Tight Mull</i> |
| Vertical Mull Width: | <i>Standard Joining Mullion</i> |
| Vertical Mull Mull Design Pressure: | <i>20</i> |
| Exterior Paint Grade: | <i>Standard Enduraclad</i> |
| Exterior Color: | <i>Fossil</i> |

| | |
|--|--|
| Interior Finish: | <i>Primed</i> |
| Glazing Type: | <i>Insulated</i> |
| Glass Strength: | <i>Annealed</i> |
| Insulated Glass Options: | <i>Low-E</i> |
| Low-E Glass Style: | <i>SunDefense™+ Low-E Insulating Glass</i> |
| Gas Filled: | <i>Argon</i> |
| High Altitude: | <i>Non High Altitude</i> |
| Glazing Lite Thickness: | <i>STC 5mm/3mm Combination</i> |
| Insulated Glass Overall Thickness: | <i>Standard Per Design</i> |
| Grille Type: | <i>No Grille</i> |
| Hardware Style: | <i>Fold-Away Crank</i> |
| Hardware Finish: | <i>White</i> |
| Hardware Type: | <i>Wash Hinge Hardware</i> |
| Window Opening Control Device: | <i>No Window Opening Control Device</i> |
| Limited Opening Hardware: | <i>No Limited Opening Hardware</i> |
| Operating Hardware Shipping Option: | <i>Shipped In Unit</i> |
| Screen Option: | <i>Full Screen</i> |
| Screen Color: | <i>White</i> |
| Screen Cloth: | <i>InView™</i> |
| Screen Shipping Option: | <i>Shipped Separate</i> |
| Attachment Method: | <i>No Attachment Method</i> |
| Jamb Extended Wall Depth: | <i>4-9/16"</i> |
| Wall Depth Application: | <i>Factory Applied</i> |
| Remake?: | <i>No</i> |
| Comment/Room: | <i>Upstairs casements</i> |
| Delivery Method: | <i>In-Store Pick-up</i> |
| Production Time (Does not include transit time): | <i>26</i> |
| Vendor Number: | <i>33070</i> |
| SOS Number: | <i>948260</i> |
| SOS Number Description: | <i>CMC Pella LS Window IHSS</i> |
| Labor SKU: | <i>1168045</i> |
| Customer Service Number: | <i>877-473-5527</i> |
| Combination U-Factor: | <i>0.25</i> |
| U-Factor : | <i>0.25</i> |
| Combination SHGC: | <i>0.2</i> |
| SHGC: | <i>0.20</i> |

| | |
|---|---|
| VLT: | 0.46 |
| CPD: | PEL-N-14-01105-00001 |
| Satisfied Energy Star Zones: | North Central,South Central,Southern |
| Satisfies 2021 IECC® Climate Zone: | Yes |
| Performance Class: | LC |
| PG: | 50 |
| Combination Positive DP Rating: | N/A |
| Calculated Positive DP Rating: | 50 |
| Combination Negative DP Rating: | N/A |
| Calculated Negative DP Rating: | 50 |
| FPA: | FL20675 |
| STC: | 31 |
| OITC: | 26 |
| Overall Rough Opening Width: | 46.75 |
| Overall Rough Opening Height: | 46.75 |
| 1168045 LABOR - CASEMENT/AWNING WINDOW: | 1168045::LABOR - CASEMENT/AWNING WINDOW |

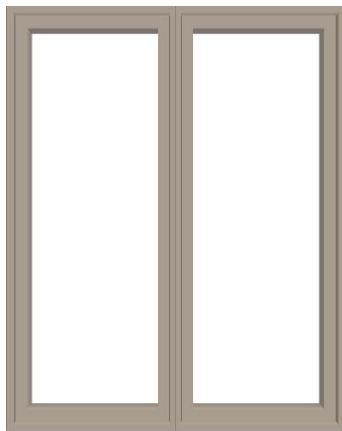


Exterior

Garage casements

Quantity 2

Options

| | |
|--|----------------------------------|
| Description: | Pella® Lifestyle Series Casement |
| Venting: | Vent |
| Number Wide: | 2 |
| Bundle: | Pella® Lifestyle Series Bundle |
| Unit Type: | Complete Unit |
| Select U.S. ENERGY STAR® Climate Zone: | South Central |
| 2021 IECC® Climate Zone for this store location: | Climate Zone 3 |
| Exterior Material Type: | Clad |
| Sizing: | Keep size |
| Standard Width: | Non Standard Width |
| Standard Height: | Non Standard Height |
| Frame Width: | 23.25 |
| Overall Frame Width: | 46.5 |
| Overall Frame Height: | 58.5 |
| Rough Opening Width: | 47.25 |

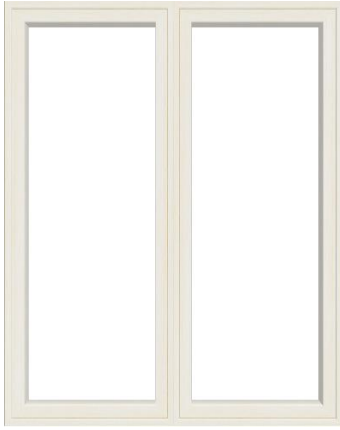

Interior

| | |
|-------------------------------------|--|
| Rough Opening Height: | 59.25 |
| Hinged Glass Panel Option: | <i>Without Hinged Glass Panel</i> |
| Operation / Venting: | |
| A1 Operation / Venting: | <i>Left</i> |
| B1 Operation / Venting: | <i>Right</i> |
| Base Frame Depth: | <i>5"</i> |
| Base Wall Depth: | <i>3 11/16"</i> |
| Vertical Mull Type: | <i>Factory Mull</i> |
| Vertical Mull Option: | <i>Tight Mull</i> |
| Vertical Mull Width: | <i>Standard Joining Mullion</i> |
| Vertical Mull Mull Design Pressure: | <i>20</i> |
| Exterior Paint Grade: | <i>Standard Enduraclad</i> |
| Exterior Color: | <i>Fossil</i> |
| Interior Finish: | <i>Primed</i> |
| Glazing Type: | <i>Insulated</i> |
| Glass Strength: | <i>Annealed</i> |
| Insulated Glass Options: | <i>Low-E</i> |
| Low-E Glass Style: | <i>SunDefense™+ Low-E Insulating Glass</i> |
| Gas Filled: | <i>Argon</i> |
| High Altitude: | <i>Non High Altitude</i> |
| Glazing Lite Thickness: | <i>Standard Per Design (2.5mm)</i> |
| Insulated Glass Overall Thickness: | <i>Standard Per Design</i> |
| Grille Type: | <i>No Grille</i> |
| Hardware Style: | <i>Fold-Away Crank</i> |
| Hardware Finish: | <i>White</i> |
| Hardware Type: | <i>Wash Hinge Hardware</i> |
| Window Opening Control Device: | <i>No Window Opening Control Device</i> |
| Limited Opening Hardware: | <i>No Limited Opening Hardware</i> |
| Operating Hardware Shipping Option: | <i>Shipped In Unit</i> |
| Screen Option: | <i>Full Screen</i> |
| Screen Color: | <i>White</i> |
| Screen Cloth: | <i>InView™</i> |
| Screen Shipping Option: | <i>Shipped Separate</i> |
| Attachment Method: | <i>No Attachment Method</i> |
| Jamb Extended Wall Depth: | <i>4-9/16"</i> |
| Wall Depth Application: | <i>Factory Applied</i> |
| Remake?: | <i>No</i> |


| | |
|--|--|
| Comment/Room: | <i>Garage casements</i> |
| Delivery Method: | <i>In-Store Pick-up</i> |
| Production Time (Does not include transit time): | <i>26</i> |
| Vendor Number: | <i>33070</i> |
| SOS Number: | <i>948260</i> |
| SOS Number Description: | <i>CMC Pella LS Window IHSS</i> |
| Labor SKU: | <i>1168045</i> |
| Customer Service Number: | <i>877-473-5527</i> |
| Combination U-Factor: | <i>0.25</i> |
| U-Factor : | <i>0.25</i> |
| Combination SHGC: | <i>0.2</i> |
| SHGC: | <i>0.20</i> |
| VLT: | <i>0.47</i> |
| CPD: | <i>PEL-N-14-01089-00001</i> |
| Satisfied Energy Star Zones: | <i>North Central,South Central,Southern</i> |
| Satisfies 2021 IECC® Climate Zone: | <i>Yes</i> |
| Performance Class: | <i>LC</i> |
| PG: | <i>45</i> |
| Combination Positive DP Rating: | <i>N/A</i> |
| Calculated Positive DP Rating: | <i>45</i> |
| Combination Negative DP Rating: | <i>N/A</i> |
| Calculated Negative DP Rating: | <i>45</i> |
| FPA: | <i>FL20675</i> |
| STC: | <i>25</i> |
| OITC: | <i>22</i> |
| Overall Rough Opening Width: | <i>47.25</i> |
| Overall Rough Opening Height: | <i>59.25</i> |
| 1168045 LABOR - CASEMENT/AWNING WINDOW: | <i>1168045::LABOR - CASEMENT/AWNING WINDOW</i> |

Sunroom Back


Quantity 3

Options

| | |
|--------------|--|
| Description: | <i>Pella® Lifestyle Series Rectangle</i> |
| Number Wide: | <i>2</i> |
| Bundle: | <i>Pella® Lifestyle Series Bundle</i> |

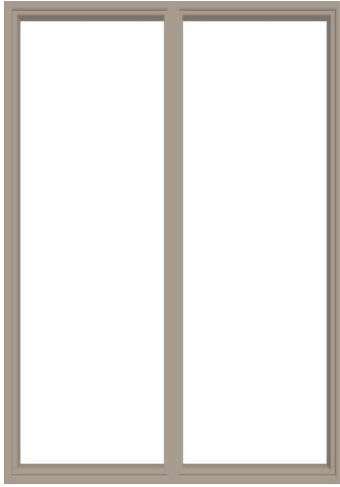

Exterior

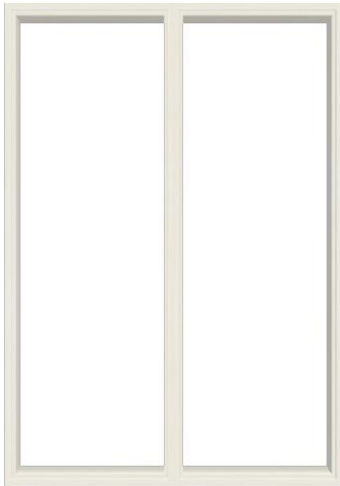

Interior

| | |
|--|--|
| Unit Type: | <i>Complete Unit</i> |
| Performance Options: | <i>Standard</i> |
| Select U.S. ENERGY STAR® Climate Zone: | <i>South Central</i> |
| 2021 IECC® Climate Zone for this store location: | <i>Climate Zone 3</i> |
| Exterior Material Type: | <i>Clad</i> |
| Sizing: | <i>Keep size</i> |
| Standard Width: | <i>Non Standard Width</i> |
| Standard Height: | <i>Non Standard Height</i> |
| Frame Width: | <i>29.25</i> |
| Overall Frame Width: | <i>58.5</i> |
| Overall Frame Height: | <i>83.5</i> |
| Rough Opening Width: | <i>59.25</i> |
| Rough Opening Height: | <i>84.25</i> |
| Hinged Glass Panel Option: | <i>Without Hinged Glass Panel</i> |
| Operation / Venting: | <i>Fixed Frame</i> |
| Base Frame Depth: | <i>5"</i> |
| Base Wall Depth: | <i>3 11/16"</i> |
| Vertical Mull Type: | <i>Factory Mull</i> |
| Vertical Mull Option: | <i>Tight Mull</i> |
| Vertical Mull Width: | <i>Standard Joining Mullion</i> |
| Vertical Mull Mull Design Pressure: | <i>20</i> |
| Exterior Paint Grade: | <i>Standard Enduraclad</i> |
| Exterior Color: | <i>Fossil</i> |
| Interior Finish: | <i>Primed</i> |
| Glazing Type: | <i>Insulated</i> |
| Insulated Type: | <i>Dual</i> |
| Glass Strength: | <i>Tempered</i> |
| Insulated Glass Options: | <i>Low-E</i> |
| Low-E Glass Style: | <i>SunDefense™+ Low-E Insulating Glass</i> |
| Gas Filled: | <i>Argon</i> |
| High Altitude: | <i>Non High Altitude</i> |
| Glazing Lite Thickness: | <i>Standard Per Design (3mm)</i> |
| Insulated Glass Overall Thickness: | <i>Standard Per Design</i> |
| Grille Type: | <i>No Grille</i> |
| Attachment Method: | <i>No Attachment Method</i> |
| Jamb Extended Wall Depth: | <i>4-9/16"</i> |

| | |
|--|---|
| Wall Depth Application: | <i>Factory Applied</i> |
| Remake?: | <i>No</i> |
| Comment/Room: | <i>Sunroom Back</i> |
| Delivery Method: | <i>In-Store Pick-up</i> |
| Production Time (Does not include transit time): | <i>26</i> |
| Vendor Number: | <i>33070</i> |
| SOS Number: | <i>948260</i> |
| SOS Number Description: | <i>CMC Pella LS Window IHSS</i> |
| Labor SKU: | <i>1168049</i> |
| Customer Service Number: | <i>877-473-5527</i> |
| Combination U-Factor: | <i>0.23</i> |
| U-Factor : | <i>0.23</i> |
| Combination SHGC: | <i>0.24</i> |
| SHGC: | <i>0.24</i> |
| VLT: | <i>0.56</i> |
| CPD: | <i>PEL-N-18-04424-00001</i> |
| Satisfied Energy Star Zones: | <i>North Central</i> |
| Satisfies 2021 IECC® Climate Zone: | <i>Yes</i> |
| Energy Star rating removed. Proceed as-is?: | <i>Yes</i> |
| Performance Class: | <i>AW</i> |
| PG: | <i>60</i> |
| Combination Positive DP Rating: | <i>N/A</i> |
| Calculated Positive DP Rating: | <i>60</i> |
| Combination Negative DP Rating: | <i>N/A</i> |
| Calculated Negative DP Rating: | <i>60</i> |
| FPA: | <i>FL10354</i> |
| STC: | <i>27</i> |
| OITC: | <i>22</i> |
| Overall Rough Opening Width: | <i>59.25</i> |
| Overall Rough Opening Height: | <i>84.25</i> |
| 1168049 LABOR - SPECIAL SHAPE/PIC - OVERSIZED: | <i>1168049::LABOR - SPECIAL SHAPE/PIC - OVERSIZED</i> |



Exterior



Interior

Triple Picture

Quantity 1

Options

| | |
|--|--|
| Description: | <i>Pella® Lifestyle Series Rectangle</i> |
| Number Wide: | 3 |
| Bundle: | <i>Pella® Lifestyle Series Bundle</i> |
| Unit Type: | <i>Complete Unit</i> |
| Performance Options: | <i>Standard</i> |
| Select U.S. ENERGY STAR® Climate Zone: | <i>South Central</i> |
| 2021 IECC® Climate Zone for this store location: | <i>Climate Zone 3</i> |
| Exterior Material Type: | <i>Clad</i> |
| Sizing: | <i>Keep size</i> |
| Standard Width: | <i>Non Standard Width</i> |
| Standard Height: | <i>Non Standard Height</i> |
| Frame Width: | <i>35.875</i> |
| Overall Frame Width: | <i>107.625</i> |
| Overall Frame Height: | <i>17.75</i> |
| Rough Opening Width: | <i>108.375</i> |
| Rough Opening Height: | <i>18.5</i> |
| Hinged Glass Panel Option: | <i>Without Hinged Glass Panel</i> |
| Operation / Venting: | <i>Fixed Frame</i> |
| Base Frame Depth: | <i>5"</i> |
| Base Wall Depth: | <i>3 11/16"</i> |
| Vertical Mull Type: | <i>Factory Mull</i> |
| Vertical Mull Option: | <i>Tight Mull</i> |
| Vertical Mull Width: | <i>Standard Joining Mullion</i> |
| Vertical Mull Mull Design Pressure: | <i>20</i> |
| Exterior Paint Grade: | <i>Standard Enduraclad</i> |
| Exterior Color: | <i>Fossil</i> |
| Interior Finish: | <i>Primed</i> |
| Glazing Type: | <i>Insulated</i> |
| Insulated Type: | <i>Dual</i> |
| Glass Strength: | <i>Annealed</i> |
| Insulated Glass Options: | <i>Low-E</i> |
| Low-E Glass Style: | <i>SunDefense™+ Low-E Insulating Glass</i> |
| Gas Filled: | <i>Argon</i> |

| | |
|--|----------------------------------|
| High Altitude: | <i>Non High Altitude</i> |
| Glazing Lite Thickness: | <i>Standard Per Design (3mm)</i> |
| Insulated Glass Overall Thickness: | <i>Standard Per Design</i> |
| Grille Type: | <i>No Grille</i> |
| Attachment Method: | <i>No Attachment Method</i> |
| Jamb Extended Wall Depth: | <i>4-9/16"</i> |
| Wall Depth Application: | <i>Factory Applied</i> |
| Remake?: | <i>No</i> |
| Comment/Room: | <i>Triple Picture</i> |
| Delivery Method: | <i>In-Store Pick-up</i> |
| Production Time (Does not include transit time): | <i>26</i> |
| Vendor Number: | <i>33070</i> |
| SOS Number: | <i>948260</i> |
| SOS Number Description: | <i>CMC Pella LS Window IHSS</i> |
| Labor SKU: | <i>1168049</i> |
| Customer Service Number: | <i>877-473-5527</i> |
| Combination U-Factor: | <i>0.23</i> |
| U-Factor : | <i>0.23</i> |
| Combination SHGC: | <i>0.24</i> |
| SHGC: | <i>0.24</i> |
| VLT: | <i>0.56</i> |
| CPD: | <i>PEL-N-18-04424-00001</i> |
| Satisfied Energy Star Zones: | <i>North Central</i> |
| Satisfies 2021 IECC® Climate Zone: | <i>Yes</i> |
| Energy Star rating removed. Proceed as-is?: | <i>Yes</i> |
| Performance Class: | <i>AW</i> |
| PG: | <i>90</i> |
| Combination Positive DP Rating: | <i>N/A</i> |
| Calculated Positive DP Rating: | <i>90</i> |
| Combination Negative DP Rating: | <i>N/A</i> |
| Calculated Negative DP Rating: | <i>90</i> |
| FPA: | <i>FL10354</i> |
| STC: | <i>27</i> |
| OITC: | <i>22</i> |
| Overall Rough Opening Width: | <i>108.375</i> |
| Overall Rough Opening Height: | <i>18.5</i> |

1168049 LABOR - SPECIAL SHAPE/PIC -
OVERSIZED:

*1168049::LABOR - SPECIAL SHAPE/PIC -
OVERSIZED*

Additional Project Details

| | | | |
|---|---|----------|----|
| Lowe's Delivery - Windows: | 2::Lowe's Delivery - Windows | Quantity | 1 |
| Reeb Interior Door: | | Quantity | 1 |
| 105451 Custom Work - Windows: | 105451::Custom Work | Quantity | 1 |
| Interior Door Labor: | | Quantity | 1 |
| 7561947 LAB IHSS - HAUL AWAY INTERIOR DR: | 7561947::LAB IHSS - HAUL AWAY INTERIOR DR | Quantity | 1 |
| OSI Quadmax: | | Quantity | 24 |
| Treated 1x4x8: | | Quantity | 88 |

| | |
|--|-------------|
| 15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings: | -\$136.27 |
| 15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings: | -\$7.96 |
| 15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings: | -\$1,301.12 |
| 15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings: | -\$16.13 |
| 15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings: | -\$16.13 |
| 15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings: | -\$9.81 |
| 15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings: | -\$9.81 |
| 15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings: | -\$23.60 |
| 15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings: | -\$342.81 |
| 15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings: | -\$15.64 |
| 15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings: | -\$1,586.96 |
| 15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings: | -\$10.66 |
| 15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings: | -\$23.60 |
| 15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings: | -\$1,207.56 |
| 15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings: | -\$200.45 |
| 15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings: | -\$718.90 |

| | |
|---|-------------|
| <i>15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings:</i> | -\$15.64 |
| <i>15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings:</i> | -\$286.68 |
| <i>15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings:</i> | -\$328.19 |
| <i>15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings:</i> | -\$394.82 |
| <i>15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings:</i> | -\$415.08 |
| <i>15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings:</i> | -\$16.20 |
| <i>15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings:</i> | -\$1,334.67 |
| <i>15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings:</i> | -\$24.74 |
| <i>15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings:</i> | -\$10.95 |
| <i>15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings:</i> | -\$10.95 |
| <i>15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings:</i> | -\$279.60 |
| <i>15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings:</i> | -\$826.26 |
| <i>15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings:</i> | -\$11.51 |
| <i>15% off Select Custom Windows, Patio Doors, and SkyLights - IHC Savings:</i> | -\$11.51 |

| | |
|------------------|-------------------|
| You Save: | \$9,594.21 |
|------------------|-------------------|

Subtotal: \$72,023.77

Total Price: \$72,023.77

Estimated Payment: \$857.43

Services

1168049 LABOR - SPECIAL
SHAPE/PIC - OVERSIZED

1168049::LABOR - SPECIAL SHAPE/PIC - OVERSIZED

1168046 LABOR -
CASEMENT/AWNING
OVERSIZED

1168046::LABOR - CASEMENT/AWNING OVERSIZED

1168045 LABOR -
CASEMENT/AWNING
WINDOW

1168045::LABOR - CASEMENT/AWNING WINDOW

Lowe's Delivery - Windows

2::Lowe's Delivery - Windows

105451 Custom Work -
Windows

105451::Custom Work

7561947 LAB IHSS - HAUL
AWAY INTERIOR DR

7561947::LAB IHSS - HAUL AWAY INTERIOR DR

Terms and Conditions

Applicable promotions included in the project price: